








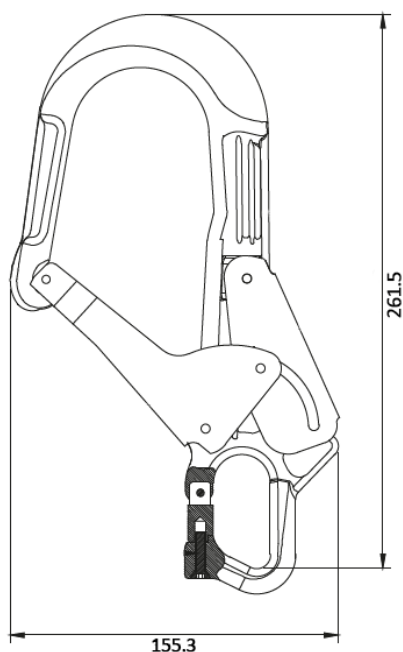

**PATENTED**



REF.	FA 50 226 60
CE	EN 362:2004 Class T EN 12275 Class K/T
	23 kN / 60 mm
MAT.	 ALU
	DOUBLE ACTION
KEYLOCK	---
+	PATENTED OPENING CONNECTION POINT
	0.52 KG

	MAT.	
Résistance à la rupture / Ouverture Breaking strength / Gate opening	Matière Material	Type d'ouverture Opening system
Resistencia a la ruptura / Apertura Resistenza alla rottura / Apertura	Material Materia	Tipo de apertura Sistema di apertura
Bruchfestigkeit / Öffnung	Material	Öffnungssystem

HS CODE
7616 9990
CARTON SIZE / PCS.
40x30x20 cm / 20
AET (EU) N°2777/15805-01/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland